
TECHNICAL DATA SHEET

Checkpoint Short Arrow®

Checkpoint® is the first ever wheel nut indicator with wheel overheating indication.

The short arrow version is designed for low loaders.



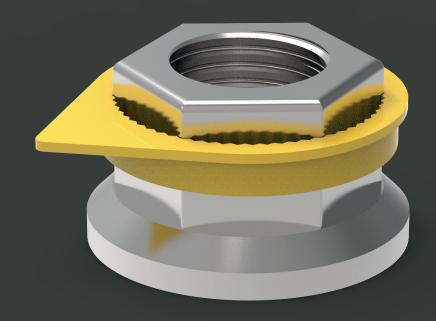





Checkpoint **Short Arrow®**

Product: Checkpoint Short Arrow® Yellow 30mm

Product Code: CPSAY30

Function: The Checkpoint Short Arrow® visually indicates wheel nut movement. It will also melt to highlight any overheating issues with the wheel. The short arrow version is designed for wheels with 225 pitch circle diameters (PCDs).

Material: We use high-grade virgin polymer to ensure product quality and reliability as an overheating indicator.

Melt temperature:


125°C/257°F (standard version). 165°C/329°F (HT version).

Application: Mainly for commercial vehicles with 17.5 or 19 inch wheels such as low loaders, double deckers and trailers.

Main benefits: Improves the safety of nut fittings. Enables quick and easy visual checks and monitoring. Reduces maintenance costs by saving time and money.

Sizes: All sizes are measured across the flat (a/f) of the nut (in mm). Available in sizes as shown on the front page.

Colour: Other colours are available subject to quantity.






Specifications

A = 7 mm B = 55 mm

C = 34 mm



SPECIFICATIONS ARE VALID FOR ALL COLOURS IN THIS SIZE

GLOBAL LEADERS IN WHEEL SAFETY

Tel: +44 (0)1524 271 200 info@checkpoint-safety.com www.checkpoint-safety.com

