


# Golight/RadioRay Halogen


37146 Old Hwy 17 - Culbertson, NE 69040 | 800.557.0098 | golight.com



## PERMANENT MOUNT

Wireless Hand-Held Remote  
2000 (white) 2051 (black)


Wired Dash-Mount Remote  
2020 (white) 2021 (black)



Wireless Hand-Held &  
Wireless Dash-Mount Remotes  
2007 (white) 2057 (black)

## PORTABLE MODELS

Suction Cup & Permanent Shoe  
Wired Remote - 5149 (charcoal)  
Wireless Remote - 7900 (white)




## PORTABLE MODELS

Suction Cup & Magnetic Shoe  
Wireless Hand-Held Remote  
7901 (white) 7951 (black)



## Golight RadioRay Halogen Light Beam Dimensions

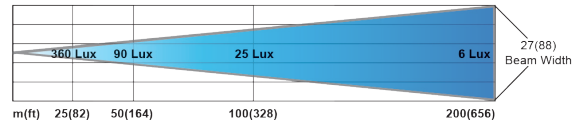


Illuminance (Lux) 360 90 25 6

Peak Beam Intensity: 225,000 Candela

Maximum Beam Distance: 949 m / 3,113 ft

Beam Angle: 8°

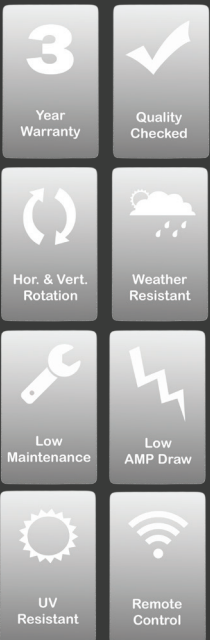

<b>Housing:</b>	Heat resistant, high impact injection molded housing ASA Polymer (white housing) ABS Polymer (black housing)
<b>Transmission Parts:</b>	Nylon, Acetal Rack O-ring, Stainless Steel pinion drive
<b>Fasteners:</b>	Stainless Steel
<b>Motors:</b>	Automotive grade 12V D.C. High Torque, R.P.M. 6087 Constant Torque 17.333mN.m/amp, Stall: 12.31 mN.m Output: 1.96 watts w/built in stall protection circuitry Built in stall protection circuitry
<b>Lamp / Cr5 Pentabeam :</b>	Phillips H9 Bulb (est. 270 life hours)
<b>Peak Beam Intensity:</b>	225,000 Candela
<b>Max Beam Distance:</b>	3,113 ft
<b>Reflector:</b>	Computer generated parabolic
<b>Voltage DC:</b>	12V
<b>Power Consumption:</b>	65W
<b>Max Current Draw:</b>	5.5 amps
<b>Wireless Remote Control:</b>	Radio Frequency: 433 MHz > 2000 possible address codes with 7 station dip switch Transmitter power: 2 Duracell MN21 12v batteries
<b>Hardwired Dash Mount Remote:</b>	On/Off switch, 4 way toggle 20' of six wire cord included; 10' increments as accessories
<b>Warranty:</b>	3 Year Limited Warranty
<b>Mounting Options:</b>	Permanent Mount, Portable Light/Magnetic Shoe, Portable Light/Permanent Shoe
<b>Rockguard:</b>	Included with all Halogen Golight/Radioray models